

Worm-Drive Hose Clamps

- Versatile clamps for wide size range of hose connections
- Made of strong, durable, noncorrosive stainless steel
- Inside of clamp is lined so that hose doesn't bulge through clamp holes
- Narrow band enables easy installation in confined areas




Lined Hose Clamp

| -- Min. to Max. Size -- inch | mm | Part Number |
|---------------------------------|---------|-------------|
| 9/16 - 13/16 | 14-21 | P532919 |
| 11/16 - 15/16 | 17-24 | P532920 |
| 13/16 - 1-1/16 | 21-27 | P532921 |
| 13/16 - 1-1/2 | 21-38 | P532923 |
| 13/16 - 1-3/4 | 21-44 | P532924 |
| 15/16 - 1-1/4 | 29-32 | P532922 |
| 1-9/16 - 2-1/2 | 40-62 | P115200 |
| 2-1/16 - 3 | 52-76 | P115201 |
| 2-13/16 - 3-3/4 | 71-95 | P143422 |
| 3-5/16 - 4-1/4 | 84-108 | P115202 |
| 4-5/16 - 5-1/4 | 109-133 | P115203 |

Recommended application up to 40 lbs-in torque

Donaldson lined hose clamps seal silicone and other soft hoses without damage. The inner liner extends under the perforations to protect the hose and prevents extrusions through the worm-gear perforations.

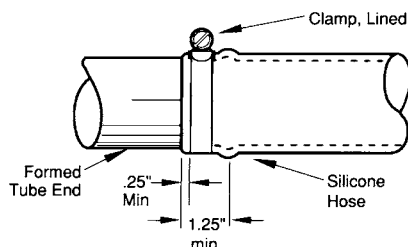

Initial torque on lined hose clamp should be 40 lbs-in. If retorquing is required, limit to 20 lbs-in.

Constant Torque Clamp

| --- Min. to Max. Size --- inch | mm | Part Number |
|-----------------------------------|---------|-------------|
| 2-1/4 - 3-1/8 | 57-79 | P532925 |
| 2-3/4 - 3-5/8 | 70-92 | P532926 |
| 3-1/4 - 4-1/8 | 83-105 | P532927 |
| 3-3/4 - 4-5/8 | 95-117 | P532928 |
| 4-1/4 - 5-1/8 | 108-130 | P532929 |

Recommended application up to 90 lbs-in torque

Donaldson Constant Torque lined clamps are the best choice for systems where clamps cannot be retightened and have difficult access. Perfect for applications requiring higher torque, large diameters, temperature extremes, or where expansions and contractions within the system are common. This clamp is a good choice for critical coolant and charge-air connections.



High Torque Clamp

| ---- Min. to Max. Size ---- inch | mm | Part Number |
|-------------------------------------|---------|-------------|
| 4-1/4 - 5-1/8 | 108-130 | P115204 |
| 5-1/4 - 6-1/8 | 133-156 | P115205 |
| 6-1/4 - 7-1/8 | 159-181 | P115206 |
| 7-1/4 - 8-1/8 | 184-206 | P115207 |
| 8-1/4 - 9-1/8 | 210-232 | P115208 |
| 10-1/4 - 11-1/8 | 260-286 | P115209 |

Recommended application up to 150 lbs-in torque

This EXTRA heavy-duty clamp ensures total protection against leakage.....eliminates the need for double clamping.

T-Bolt Clamps



T-Bolt Clamp

| Nominal I.D. ¹ | Min. to Max. Size inch | mm | Part Number |
|---------------------------|---------------------------|---------|-------------|
| 2.00 | 2.25-2.53 | 57-64 | P148337 |
| 2.25 | 2.50-2.78 | 63-70 | P148338 |
| 2.50 | 2.81-3.09 | 71-78 | P148339 |
| 2.75 | 3.06-3.34 | 78-85 | P148340 |
| 3.00 | 3.31-3.59 | 84-91 | P148341 |
| 3.50 | 3.81-4.09 | 98-104 | P148342 |
| 4.00 | 4.31-4.59 | 109-116 | P148343 |
| 4.50 | 4.81-5.09 | 122-129 | P148344 |
| 5.00 | 5.31-5.59 | 135-142 | P148345 |
| 5.50 | 5.94-6.21 | 151-158 | P148346 |
| 6.00 | 6.38-6.65 | 162-169 | P148347 |
| 7.00 | 7.38-7.78 | 187-198 | P148348 |
| 8.00 | 8.25-8.56 | 216-226 | P148349 |
| 10.00 | 10.50-10.91 | 267-277 | P148350 |

1 - Nominal I.D. dimension, shown in inches, corresponds to I.D. dimension of rubber part being clamped.