


Ambient Air Tubesheets

Models T-46 through T-99118

Filter section for existing or built-up air handling and HVAC systems.

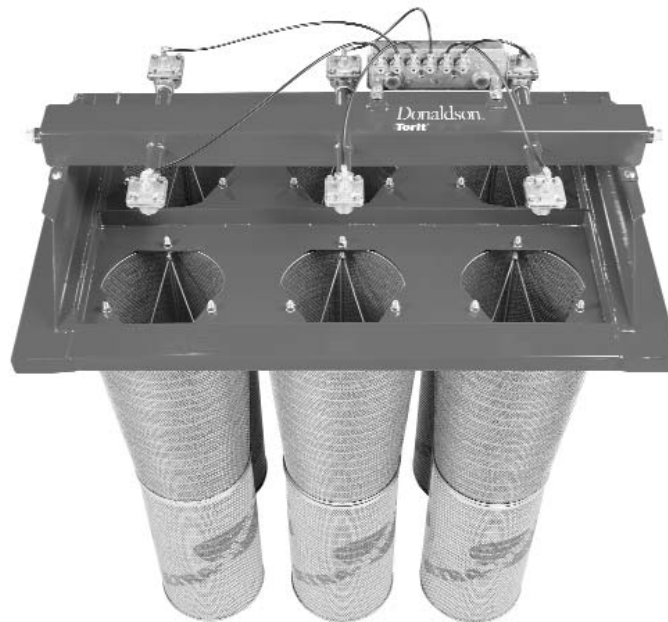

T-69

Flexible

- Unique filtration design is especially useful in applications that require customized packaging of the filters to meet requirements for airflow, physical size, or integration with other equipment.
- Excellent alternative in industrial environments where dust loading is too high for standard HVAC panel-type filters.

Powerful

- Standard Ultra-Web® cartridges with nanofiber technology, provide higher filtration efficiency and long filter life.

- MERV* 13 filtration efficiency rating outperforms the competition's standard filters.
- Automatic pulse-cleaning design for continuous operation.


Cost Effective

- Low system pressure drop keeps operating costs down and saves energy.
- Easy filter changeout for quicker maintenance.

Ambient Air Tubesheet

Operational Explanation

During normal operation, air flows inward through the intake duct and passes through the filter elements. Dust is collected on the outside surfaces of the elements. Clean air flows through the center of the elements into the clean air plenum.

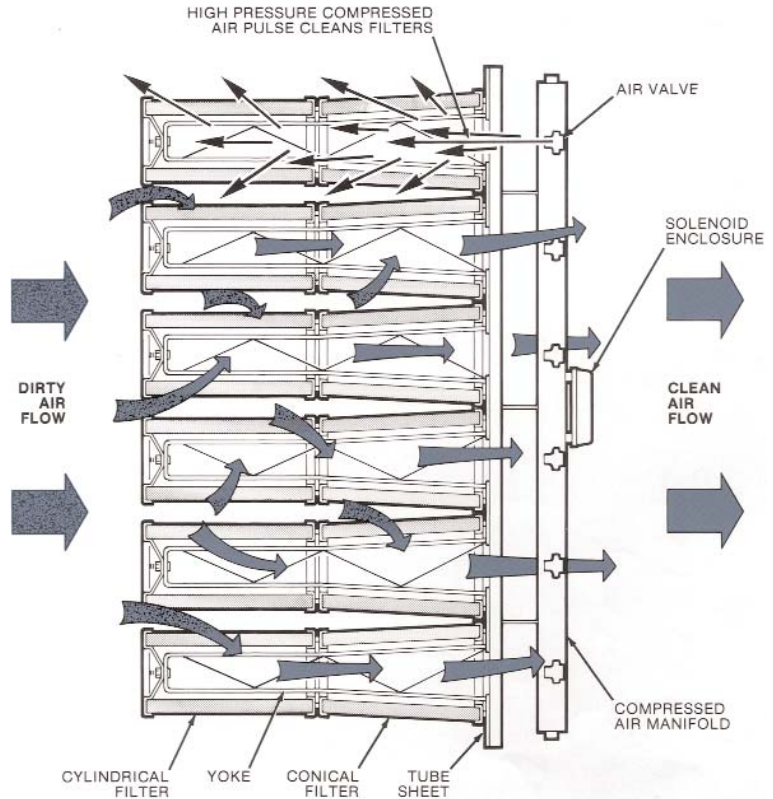

Dimensions & Specifications

Model	Nominal Airflow Range** (cfm)	Filter Area (ft ²)	No. of Filters Ultra-Web®	Filter Arrangement		No. of Valves	Dimensions (inches)†			Shipping Weight (lbs)
				Columns	Rows		W	H	L	
T-46	4,950-6,660	1,460	8	2	2	4	40.0	36.5	69.9	370
T-69	6,600-9,900	2,190	12	3	2	6	56.5	36.5	69.9	520
T-913	9,900-13,200	2,920	16	4	2	8	73.0	36.5	69.9	670
T-1216	11,000-16,500	3,650	20	5	2	10	89.5	36.5	70.1	825
T-1319	13,200-19,800	4,380	24	4	3	12	73.0	53.0	68.3	960
T-1929	19,800-29,700	6,570	36	6	3	18	106.0	53.0	68.3	1,415
T-2939	29,700-39,600	8,760	48	4	6	24	73.0	102.5	68.3	1,800
T-3959	39,600-59,400	13,140	72	6	6	36	106.0	102.5	68.3	2,660
T-5979	59,400-79,200	17,520	96	8	6	48	139.0	102.5	68.3	3,500
T-7999	79,200-99,000	21,900	120	10	6	60	172.0	102.5	68.3	4,360
T-99118	99,000-118,800	26,280	144	12	6	72	223.0	102.5	68.3	5,210

* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (1999) test standards. The MERV rating was determined at a face velocity of 118 feet per minute and loading up to four inches water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

** Based on clean filters.

† Exact dimensions to be confirmed after receipt of order.



Donaldson Company, Inc.
Industrial Air Filtration
P.O. Box 1299
Minneapolis, MN 55440

Tel 800-365-1331(USA)
Tel 800-343-3639 (Mexico)
dustmktg@mail.donaldson.com
www.donaldsontorit.com

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts.

Visit us at www.donaldsontorit.com

Information in this document is subject to change without notice.

© 1992 Donaldson Co., Inc.
Printed in U.S.A. on recycled paper

Data Sheet Ambient Air Tubesheet (10/06)

